

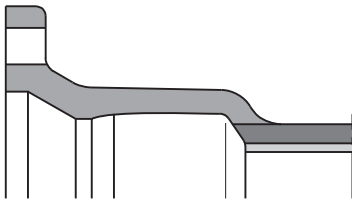


Stopfbuchsenmuffen-Verbindung nach DIN 28602

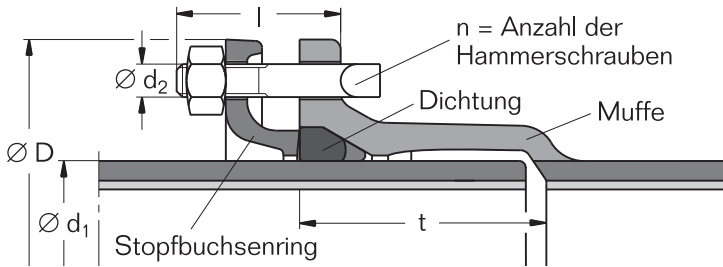

Muffen für Formstücke

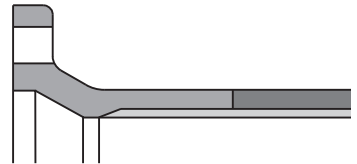

Muffen für EU/U-Stücke

Nennweite	Maße in mm						Gewichte in kg \approx				
	$\varnothing d_1$	$\varnothing D'$	t	$\varnothing d_2$	l	n	Muffe Form- stücke	Muffe EU/U- Stücke	Stopf- buchs.- ringe	Dich- tungen	Ham- mer- schr.
400	429	570	132	M 20	90	12	32,2	27,6	10,6	0,8	5,5
500	532	680	138	M 20	100	16	45,3	38,7	15	1,1	7,7
600	635	790	143	M 20	100	16	61,2	52,2	20,9	1,5	7,7
700	738	900	149	M 20	110	20	80	67,9	27,2	1,9	10
800	842	1010	154	M 20	110	24	101	85,4	34,1	2,3	12
900	945	1125	160	M 20	120	24	128	108,4	44	2,9	12,5
1000	1048	1250	165	M 24	120	24	162,9	138,7	56,9	3,5	18,5

¹⁾ Richtwert