


## Glattrohre ( GL )

### für Dichtheitsprüfung mit Unterdruck

nach DIN EN 598 / Innen und außen Epoxidharz - Beschichtung

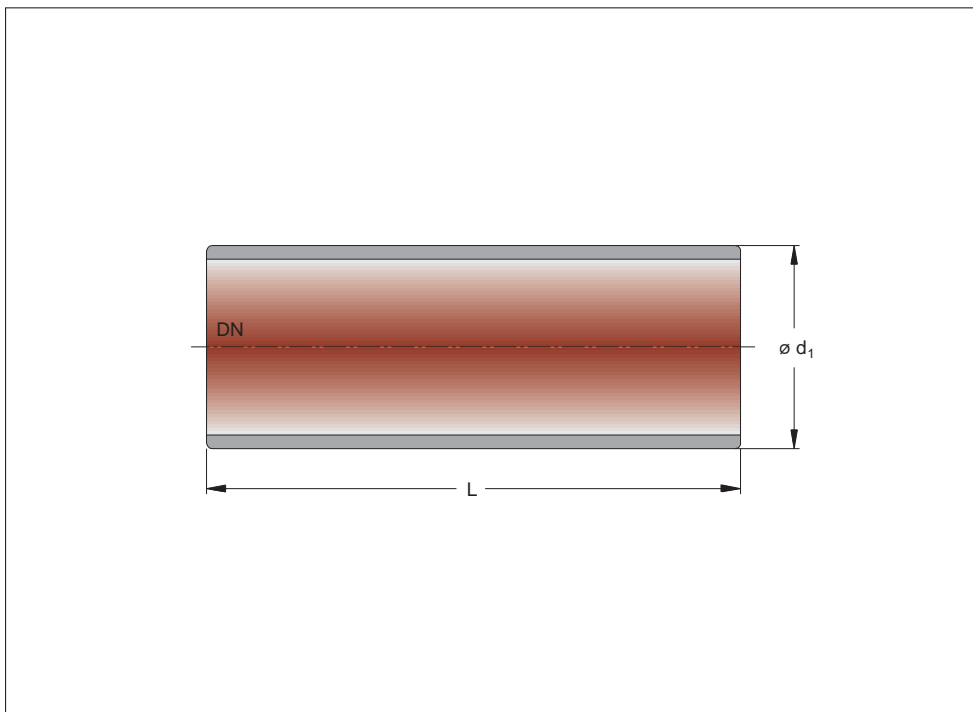

DN	$\varnothing d_1$ mm	L mm	Gewicht kg
100	118	500	7,5
125	144	500	9,5
150	170	500	11,8
200	222	500	15,0
250	274	1000	40,0
300	326	1000	51,0
350	378	1000	63,0
400	429	1000	75,5
500	532	1000	104,0
600	635	1000	137,0
700	738	1000	174,0
800	842	1000	215,0
900	945	1000	260,0
1000	1048	1000	309,0