


**Steckmuffenverbindung nach DIN 28 603 ( TYTON® )**

nach DIN EN 598 / Innen und außen Epoxidharz - Beschichtung

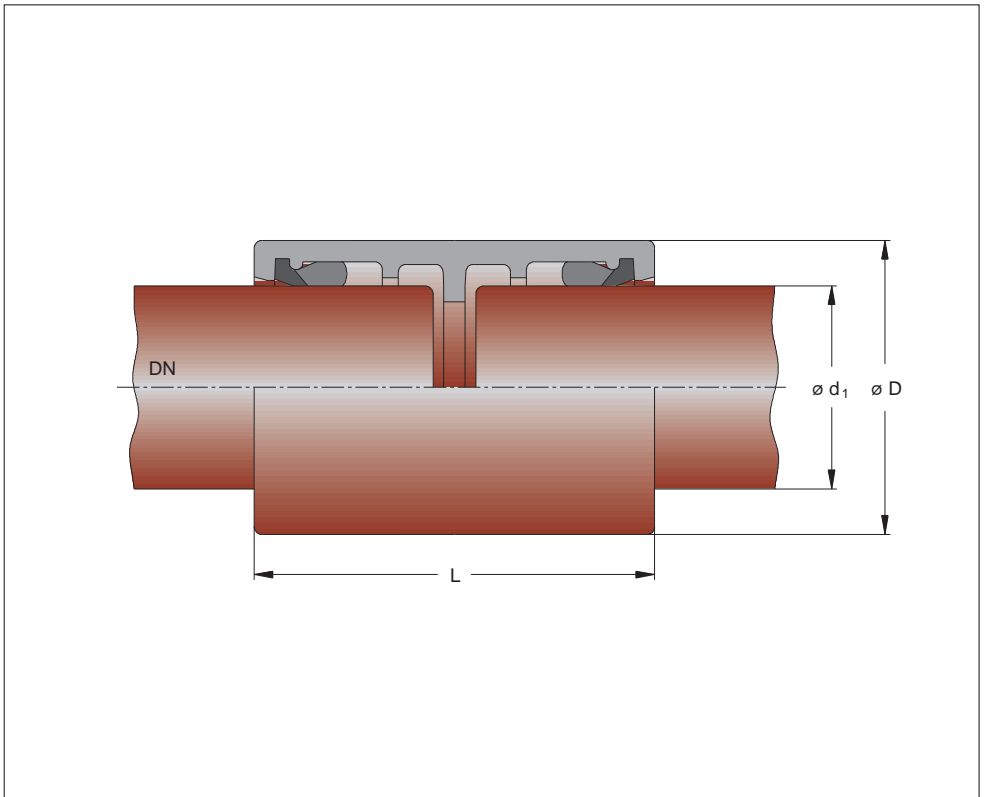

DN	ø d <sub>1</sub> mm	ø D mm	L mm	Abwinkelung pro Muffe	Gewicht kg
150	170	210	160	5°	8,0
200	222	262	165	5°	11,5
250	274	315	180	5°	14,5
300	326	370	200	5°	20,0
400	429	480	210	4°	32,0
500	532	590	225	3°	45,0
600	635	695	250	3°	56,0
700	738	810	305	3°	97,0
800	842	920	325	3°	128,0
900	945	1025	350	3°	169,0
1000	1048	1135	365	3°	205,0